



PROFESSIONAL TYRES

ALBOURGH PORT-MOVE

The Albourgh PORT-MOVE is a professional tyre for terminal tractors, developed for intensive use in port and terminal environments.

The tyre is designed for high loads, low speeds and continuous manoeuvring, with stability and safety at its core.

Thanks to its robust construction and deep tread, PORT-MOVE delivers consistent grip, long-lasting wear resistance and reliable performance under heavy-duty conditions. This keeps operations moving with minimal downtime and maximum availability.

PORT-MOVE

STABLE PERFORMANCE

Terminal operations demand predictability.

Frequent turning and stopping, varying surfaces and heavy loads place high demands on the tyre and on operational continuity.

The Albough PORT-MOVE supports a stable and controlled driving experience, even during intensive shunting and coupling. This helps reduce tyre stress and unnecessary wear, contributing to efficient fleet utilisation.

PORT-MOVE is therefore a reliable choice for terminals and logistics hubs focused on safe operations, stable performance and maximum availability. .

- › HIGH LOAD CAPACITY AND MAXIMUM STABILITY FOR TERMINAL TRACTORS IN HEAVY-DUTY USE
- › ROBUST CARCASS CONSTRUCTION FOR EXTRA PROTECTION AGAINST IMPACT AND DAMAGE
- › DEEP TREAD AND DURABLE DESIGN FOR LONG SERVICE LIFE AND MINIMAL DOWNTIME
- › STABLE PERFORMANCE AT LOW SPEEDS AND DURING INTENSIVE MANOEUVRING
- › RELIABLE GRIP AND HEAT DISSIPATION DEMANDING PORT AND TERMINAL CONDITIONS



TECHNICAL SPECIFICATIONS:

SIZE	L/S INDEX	RIM	DIAMETER (MM)	WIDTH (MM)	LOAD AT 40 KM/H (10.00 BAR)	TREAD DEPTH (MM)	WEIGHT (UNIT)
280/75R22,5	168A8	8.25x22,5	988	273	5600	32	76
310/80R22,5	175A8	9.00x22,5	1078	304	6900	32	87



Scan QR code for more information

ALBOUGH.COM






PORT-MOVE

Air Pressure Tables

280/75R22.5 ALBOURGH PORT MOVE 168A8 IND-3 TL

Air pressure (kPa)

Speed	350	375	400	425	450	475	500	525	550	575	600
0 km/h	5825	6134	6438	6738	7033	7324	7611	7895	8175	8452	8726
5 km/h	4186	4409	4627	4843	5055	5264	5470	5674	5876	6075	6272
10 km/h	3640	3834	4024	4211	4395	4577	4757	4934	5109	5283	5454
25 km/h	2912	3067	3219	3369	3516	3662	3805	3947	4087	4226	4363
40 km/h	2548	2684	2817	2948	3077	3204	3330	3454	3577	3698	3818

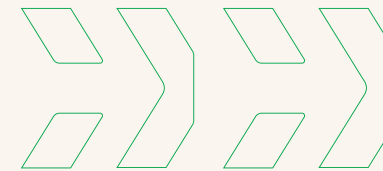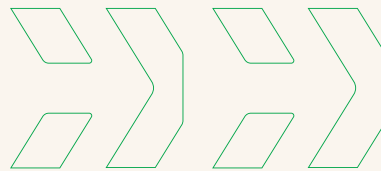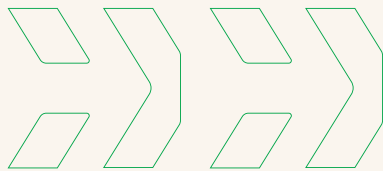

280/75R22.5 ALBOURGH PORT MOVE 168A8 IND-3 TL




Air pressure (kPa)

Speed	625	650	675	700	725	750	775	800	825	850	875	900	925	950	975	1000
0 km/h	8997	9266	9532	9796	10057	10316	10573	10827	11080	11331	11580	11827	12073	12317	12559	12800
5 km/h	6467	6660	6851	7041	7228	7415	7599	7782	7964	8144	8323	8501	8677	8853	9027	9200
10 km/h	5623	5791	5958	6122	6286	6447	6608	6767	6925	7082	7238	7392	7546	7698	7850	8000
25 km/h	4499	4633	4766	4898	5028	5158	5286	5414	5540	5666	5790	5914	6037	6158	6280	6400
40 km/h	3936	4054	4170	4286	4400	4513	4626	4737	4848	4957	5066	5175	5282	5389	5495	5600

PORT-MOVE

Air Pressure Tables

310/80R22.5 ALBOURGH PORT MOVE 178A5 IND-3 TL											
Air pressure (kPa)											
Speed	350	375	400	425	450	475	500	525	550	575	600
0 km/h	7177	7558	7933	8302	8665	9024	9378	9727	10073	10414	10752
5 km/h	5158	5432	5702	5967	6228	6486	6740	6991	7240	7485	7728
10 km/h	4485	4724	4958	5189	5416	5640	5861	6080	6295	6509	6720
25 km/h	3588	3779	3966	4151	4333	4512	4689	4864	5036	5207	5376
40 km/h	3140	3307	3471	3632	3791	3948	4103	4256	4407	4556	4704

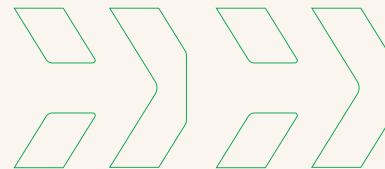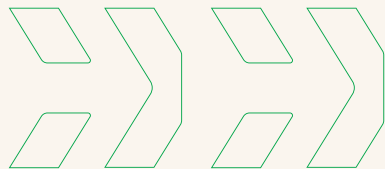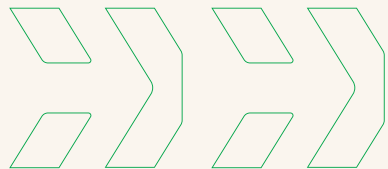

310/80R22.5 ALBOURGH PORT MOVE 178A5 IND-3 TL																
Air pressure (kPa)																
Speed	625	650	675	700	725	750	775	800	825	850	875	900	925	950	975	1000
0 km/h	11086	11417	11745	12070	12392	12711	13027	13341	13652	13962	14268	14573	14876	15176	15475	15771
5 km/h	7968	8206	8442	8675	8906	9136	9363	9589	9813	10035	10255	10474	10692	10908	11122	11336
10 km/h	6929	7136	7341	7544	7745	7944	8142	8338	8533	8726	8918	9108	9297	9485	9672	9857
25 km/h	5543	5709	5872	6035	6196	6355	6514	6671	6826	6981	7134	7287	7438	7588	7737	7886
40 km/h	4850	4995	5138	5280	5421	5561	5699	5837	5973	6108	6242	6376	6508	6640	6770	6900